



GMRS AE9000-U Antenna Quick Start Guide


Features:

- Low Profile - 4.0"
- NMO Base with Removable Coax Cable
- Ground Dependent Design
- Pre-terminated FME Connector
- Frequency: 462-468 MHz
- Gain: 2.1 dBi
- Compatible with 1/8" to 1/4" bracket thickness
- Install directly into a 3/8" hole, or into a 5/8" hole using the included mounting bush

Assembly Overview

- 1) Assemble base as below choosing the option for either a 3/8" or 5/8" mounting hole.
- 2) Screw the NMO nut onto the base and tighten with a wrench. Maximum torque: 16 ft-lbs (22Nm).
- 3) Screw in the Antenna to the NMO nut by hand until snug.
- 4) Attach and tighten the supplied coax cable to the right angle adapter.

For Mounting 3/8" Hole

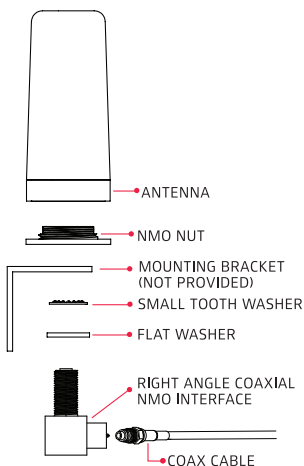

For Mounting 5/8" Hole

